

Technical Datasheet

Damp proof underlayer Tarkodry wall & floor

UNDERLAY & OVERLAY SOLUTIONS

DESCRIPTION

Glue-down homogeneous PVC underlayer, specially design to create waterproofness in wet room areas under ceramics.

Key features:

- Watertight layer under ceramic tile (wetroom floor and wall) for a safe and longlasting solution.
- Long-term waterproof warranty.
- Good adhesion via its embossed structure.
- Internally flexible homogeneous structure for easy installation and welding.


Subfloor type & applications:

- Residential and commercial applications.
- Cement substrates, cardboard dressed plaster.

Compatible flooring:

- Ceramic tiles

Main segments of application:

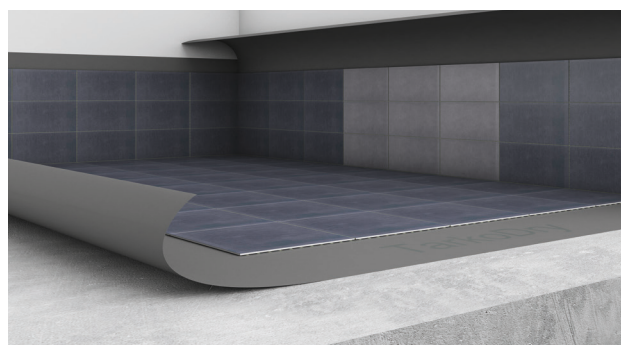

INSTALLATION

- The subfloor or wall must be clean, dry, and without any residue.
- The subfloor should have a moisture content of max 8%.
- Be careful of countries standards.
- Please refer to the installation sheet for more information.

TECHNICAL INFORMATION

Product

Size (mm)	Floor	20 length x 2 width
	Wall	35 length x 2 width
Thickness (mm)	Floor	1.5
	Wall	1.2
Total weight (g/m ²)	Floor	2,600
	Wall	2,000

Packaging

Min. order	Floor	1 roll (40m ²)
	Wall	1 roll (70m ²)

ARTICLE CODE

		SAP Code	EAN Code
	Grey Floor	3137 027	3423128460421
	Grey Wall	3137 028	7393799143533

CLEANING & MAINTENANCE

No cleaning or maintenance required.