


# Classic 40

## Datasheet

| Classification                                       | Norm           | Tarkett Value                                             |
|------------------------------------------------------|----------------|-----------------------------------------------------------|
| Product type                                         | EN ISO 26986   | Heterogeneous poly(vinyl chloride) floor coverings        |
| Domestic classification                              | EN ISO 10874   | 23 Heavy                                                  |
| Commercial classification                            | EN ISO 10874   | 32 General                                                |
| Industrial classification                            | EN ISO 10874   | 41 Moderate                                               |
| Binder content                                       | ISO 11638      | Type I                                                    |
| Technical Characteristics                            | Norm           | Tarkett Value                                             |
| Total thickness                                      | ISO 24346      | 2 mm                                                      |
| Wear layer thickness                                 | ISO 24340      | 0,40 mm                                                   |
| Total weight                                         | ISO 23997      | 2150 g/m²                                                 |
| Performance for CE Marking                           | Norm           | Tarkett Value                                             |
| Declaration of Performance #                         | EN 14041       | 0007-0070-DoP-2024-10                                     |
| Reaction to fire                                     | EN 13501-1     | Cfl-s1                                                    |
| Slip resistance (EN 13893)                           | EN 13893       | Class DS ( $\mu \geq 0,30$ )                              |
| Slip resistance                                      | DIN 51130      | R10                                                       |
| Static Electrical Propensity                         | EN 1815        | Antistatic ( $\leq 2$ kV)                                 |
| Thermal resistance                                   | ISO 10456      | 0,020 m²·K/W                                              |
| Technical Performance                                | Norm           | Tarkett Value                                             |
| Residual indentation                                 | EN ISO 24343-1 | $\leq 0,10$ mm                                            |
| Castor chair                                         | ISO 4918       | No damage after 25000 cycles                              |
| Furniture leg                                        | EN 424         | No damage                                                 |
| Impact sound reduction - $\Delta L_w$                | EN ISO 717-2   | 13 dB                                                     |
| Light fastness                                       | ISO 105-B02    | $\geq 6$                                                  |
| Chemical resistance                                  | ISO 26987      | Not affected                                              |
| Underfloor heating                                   |                | Suitable (subfloor temperature maximum 27°C)              |
| Dimensional stability                                | EN ISO 23999   | $\leq 0.40$ %                                             |
| Curl resultant to heat                               | ISO 23999      | $\leq  8 $ mm                                             |
| Sustainability performances                          | Norm           | Tarkett Value                                             |
| Recyclability through ReStart®                       |                | Offcuts / Post-use - Contact Tarkett for more information |
| Recycled content                                     |                | 26 %                                                      |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) |                | 5,95 kg CO <sub>2</sub> eq /m²                            |
| Total VOC Emissions (after 28 days)                  | EN 16516       | Gold ( $\leq 100$ µg / m³)                                |
| Formaldehyde emission                                |                | E1                                                        |
| Dimensions and designs                               |                |                                                           |
| Roll                                                 |                | Roll 2 x 25 m<br>Roll 3 x 25 m<br>Roll 4 x 25 m           |
| Number of designs available                          |                | 24                                                        |

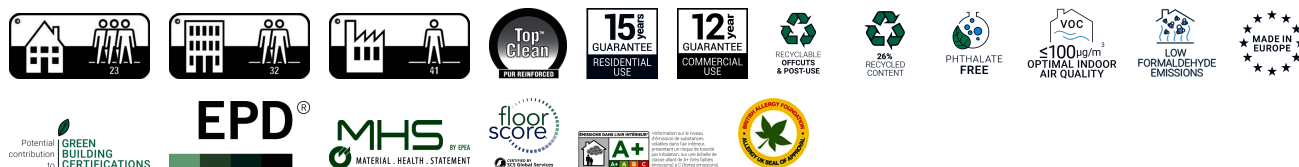

The above information is subject to modification for the benefit of further improvement (24/04/2026). According to the European Regulation N°305/2011 for CE Marking, the Declarations of Performance are available on our website <https://www.tarkett.com>. Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for the instructions.