


# iD Classics Loose-Lay 55

## Datasheet

| Classification                                                     | Norm                                                                                                                                                                           | Tarkett Value                                             |
|--------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| Product type                                                       | EN ISO 10582                                                                                                                                                                   | Heterogeneous poly(vinyl chloride) floor coverings        |
| Domestic classification                                            | EN ISO 10874                                                                                                                                                                   | 23 Heavy                                                  |
| Commercial classification                                          | EN ISO 10874                                                                                                                                                                   | 33 Heavy                                                  |
| Industrial classification                                          | EN ISO 10874                                                                                                                                                                   | 42 General                                                |
| Commercial warranty (in years)                                     |                                                                                                                                                                                | 10 years                                                  |
| Technical Characteristics                                          | Norm                                                                                                                                                                           | Tarkett Value                                             |
| Total thickness                                                    | EN ISO 24346                                                                                                                                                                   | 4,50 mm                                                   |
| Wear layer thickness                                               | EN ISO 24340                                                                                                                                                                   | 0,55 mm                                                   |
| Total weight                                                       | EN ISO 23997                                                                                                                                                                   | 7800 g/m²                                                 |
| Binder content                                                     | EN ISO 10582                                                                                                                                                                   | Type I                                                    |
| Surface treatment                                                  |                                                                                                                                                                                | TEKTANIUM®                                                |
| Bevelled edges                                                     |                                                                                                                                                                                | No bevel<br>4 sides                                       |
| Installation method                                                |                                                                                                                                                                                | Loose-Lay                                                 |
| Performance for CE Marking                                         | Norm                                                                                                                                                                           | Tarkett Value                                             |
| Declaration of Performance #                                       | EN 14041                                                                                                                                                                       | 0197-0017-DoP-2026-01                                     |
| Technical Performance                                              | Norm                                                                                                                                                                           | Tarkett Value                                             |
| Dimensional stability                                              | EN ISO 23999                                                                                                                                                                   | Average measured value : ≤ 0.10 %                         |
| Curl resultant to heat                                             | EN ISO 23999                                                                                                                                                                   | ≤  1  mm                                                  |
| Reaction to fire                                                   | EN 13501-1                                                                                                                                                                     | Bfl-s1                                                    |
| Residual indentation                                               | EN ISO 24343-1                                                                                                                                                                 | ≤ 0,10 mm                                                 |
| Furniture leg                                                      | EN ISO 16581                                                                                                                                                                   | No damage                                                 |
| Castor chair                                                       | EN ISO 4918                                                                                                                                                                    | No damage                                                 |
| Impact sound reduction - ΔLw                                       | EN ISO 717-2                                                                                                                                                                   | 6 dB                                                      |
| Reduction of in-room impact noise                                  | NF S31-074                                                                                                                                                                     | Class C (≤ 85 dB)                                         |
| Thermal resistance                                                 | EN ISO 10456                                                                                                                                                                   | 0,04 m²·K/W                                               |
| Light fastness                                                     | EN ISO 105-B02                                                                                                                                                                 | ≥ 6                                                       |
| Chemical resistance                                                | EN ISO 26987                                                                                                                                                                   | Good resistance                                           |
| Slip resistance                                                    | EN 16165 Annex B                                                                                                                                                               | R10                                                       |
| Slip resistance (EN 13893)                                         | EN 13893                                                                                                                                                                       | Class DS (μ ≥ 0,30)                                       |
| Static Electrical Propensity                                       | EN 1815                                                                                                                                                                        | Antistatic (≤ 2 kV)                                       |
| Underfloor heating                                                 |                                                                                                                                                                                | Suitable (subfloor temperature maximum 27°C)              |
| Sustainability performances                                        | Norm                                                                                                                                                                           | Tarkett Value                                             |
| Recyclability through ReStart®                                     |                                                                                                                                                                                | Offcuts / Post-use - Contact Tarkett for more information |
| Recycled content                                                   | ISO 14021                                                                                                                                                                      | 20 %                                                      |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)               |                                                                                                                                                                                | 12,18 kg CO₂eq /m²                                        |
| Total Carbon Footprint (EPD Modules A-D, incl. recycling scenario) |                                                                                                                                                                                | 6,05 kg CO₂eq /m²                                         |
| Total VOC Emissions (after 28 days)                                | EN 16516                                                                                                                                                                       | Platinum (≤ 10 µg/m³)                                     |
| REACH                                                              |                                                                                                                                                                                | Yes                                                       |
| Dimensions and designs                                             |                                                                                                                                                                                |                                                           |
| Tile                                                               | Tile 607 x 330mm - 12 tiles=2,4 m²/box - 44 boxes/pallet<br>Tile 660x660mm - 5 tiles=2,18 m²/box - 42 boxes/pallet<br>Tile 997 x 497mm - 5 tiles=2,48 m²/box - 42 boxes/pallet |                                                           |
| Number of designs available                                        | 30                                                                                                                                                                             |                                                           |

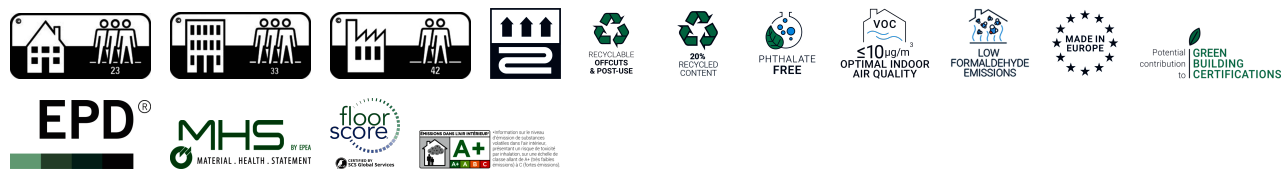

The above information is subject to modification for the benefit of further improvement (09/07/2026). According to the European Regulation N°305/2011 for CE Marking, the Declarations of Performance are available on our website <https://www.tarkett.com>. Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for the instructions.