


Ravèl

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/2 "					
Aspect	ISO 2424		Loop pile					
Dye method			Stock dyed					
Width		cm	400		ft	13.1		
Primary backing	ISO 2424		Polypropylene woven					
Secondary backing	ISO 2424		Polypropylene woven					
Pile fibre composition	ISO 2424		100% New Zealand wool					
Total thickness	ISO 1765	mm	14.2		inch	0.6		
Effective pile thickness	ISO 1766	mm	9.2		inch	0.36		
Total mass	ISO 8543	g/m²	3060		oz/yd²	90.3		
Total pile mass	ISO 2424	g/m²	2050		oz/yd²	60.5		
Effective pile mass	ISO 8543	g/m²	1409		oz/yd²	41.6		
Pile density	ISO 8543	g/cm³	0.153		lb/in³	0.0055		
Number of tufts	ISO 1763	/dm²	137		/yd²	11455		
Stroll test	ISO 6356	kV						
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		32 Commercial - general use (tested on carpet underlay)					
Luxury rating	EN 1307		LC 5					
Impact sound reduction ΔL _w	ISO 10140	dB	32					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	0.02	0.07	0.17	0.39	0.66	0.97
Noise reduction	ISO 354	α _w	0.25					
Thermal resistance	ISO 8302	m².K/W	0.240					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		2C6E3EAA					

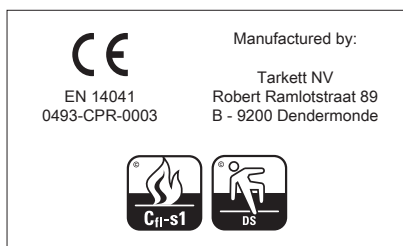

DESSO flooring products are to be installed in full accordance with Tarkett's installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. DESSO flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20260602