Soundstop Plus 2 mm: 15 x 1 m (15 m²)

Art. nr - 68832

Scan this QR code to view this product on our website.

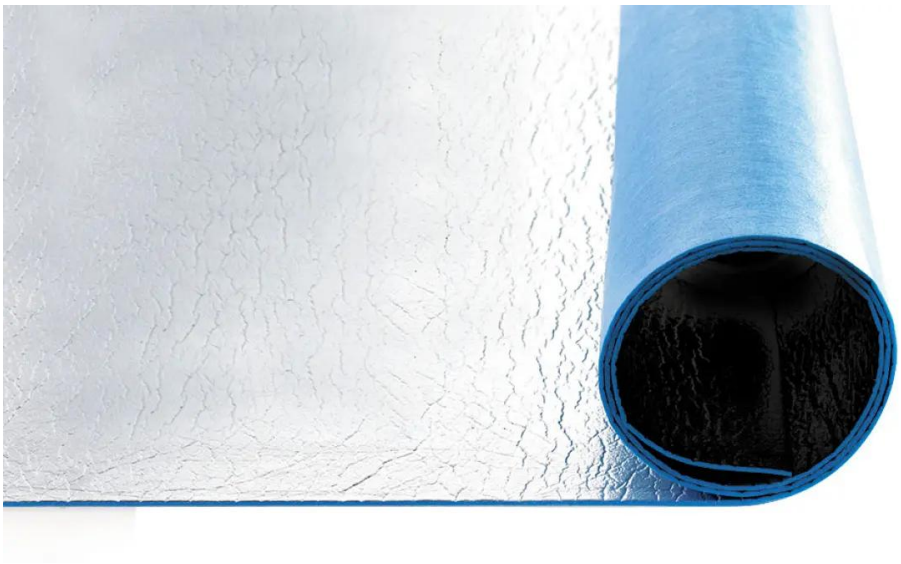

Description

Soundstop Plus 2 mm is a PE foam with an aluminum moisture barrier. It offers high compressive strength and provides a completely flat and smooth base for wooden flooring. Suitable for laminate and parquet for both residential and project use.

- Excellent contact sound insulation
- Stable and easy to install
- Suitable for underfloor heating

Soundstop Plus 2 mm: 15 x 1 m (15 m²)

Art. nr - 68832

Specifications

Floor type	Parquet / Laminate
Thickness	2 mm
Type of base floor	Fixed sand cement floor / Floating screed
Domestic use	Yes
PC (Punctual Conformability)	> 0.5 mm
CS	CS0
CS/CC (compressive Strength / Compressive Creep)	> 60 kPa
Product weight	200 g/m²
Product dimensions (Length)	15 m
Product dimensions (Width)	1 m
Product dimensions in m2	15 m²
Sound-reducing - ΔLw	19 dB ΔLw
TOG rating	0.7 TOG
Thermal resistance - R-value	0.07 m² K/W
DIBT certificate	Z-158.10-79
Suitable for underfloor heating	Yes
Suitable for floor cooling	Yes
SD (Steam Diffusion)	>75 micron
Fire classification	Efl
Flame-retardant - Test method	EN ISO 9239-1
Density	100 kg/m³

Soundstop Plus 2 mm: 15 x 1 m (15 m²)

Art. nr - 68832

Material	Top layer: PE foamBottom layer: Moisture barrier
Brand	Soundstop
VOC label	A+
Laying method	Floating
Wheelchair load (Test method: EN 985)	Suitable
CS/CC (Compressive Strength / Compressive Creep)	> 60 kPa

Soundstop Plus 2 mm: 15 x 1 m (15 m²)

Art. nr - 68832













