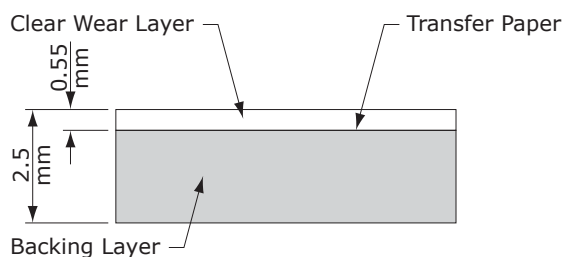


DESCRIPTION *(all sizes and weights are nominal)*

Part Number:	VPMxxx-0848	Color Numbers (xxx):	001 North Sea
Thickness:	0.100 in. (2.5 mm)		002 Antwerp
Width:	7.25 in. (18.4 cm)		003 Vienna
Length:	48 in. (121.9 cm)		004 Florentine
Weight:	0.8 lbs./sq. ft. (4.0 kg/m ²)		
	2 lbs./plank (0.9 kg/plank)		

PROPERTIES

- ▶ MED Certified (#164.117/ERO2812/MED0505TE)
- ▶ USCG Certified (#164.117/ERO2812/MED0505TE)
- ▶ MCA Certified (#WCL1121/MER0505TE)
- ▶ Meets FMVSS 302 (per 49 CFR §571.302)
- ▶ Phthalate free (REACH compliant, SVHC free)
- ▶ Polyurethane coating
- ▶ FloorScore® Indoor Air Quality (IAQ) Certified; conforms to CA Specification 01350

STRUCTURE *(all measurements are nominal; not to scale)***TEST DATA** *(refer to the last page for additional test information)*

Abrasion Resistance		Result	
ASTM F510: 1,000 cycles		0.05 g (0.11%) loss	
Chemical Resistance <i>(each reagent tested individually)</i>		Result	
		ASTM F925: 5 min.	ASTM F925: 24 hr.
- Ammonia (5% NH₄OH) - Bleach (5.25% NaOCl) - Diesel Fuel - Hydraulic Oil - Motor Oil	- Mustard - Red Wine - Transmission Oil - Urea (20% Solution)	No Change	No Change
	Acetone	Slight Change	Moderate Change
Static Coefficient of Friction		Result	
ASTM D2047: No Floor Finish Applied		Neolite: 0.75	